

# PNM-9000VD

10МП H.265 Мультисенсорная камера



## Key Features

- Сменные модули объектива, разрешение 2 x 5 Мп
- До 30 кад/с при любом разрешении (H.265/H.264)
- WDR 120 дБ
- Объектив 3,7 мм, 4,6 мм, 7 мм с постоянным фокусом (модуль 5 Мп)
- Поддержка кодеков H.265, H.264, MJPEG, многоканальная передача видео
- Видеоаналитика, WiseStream II
- 2 слота для карт памяти micro SD / SDHC / SDXC
- IP66, IK10, технология PoE

## Compatible lenses



SLA-5M3700D



SLA-5M4600D



SLA-5M7000D

## Compatible Accessories (Optional)



SBP-300KMW



SBP-300PMW



SBP-300CMW



SBP-300BW



SBP-300NBW



SBP-300LMW



SBP-300WMW1



SBP-300WMW

Video	
Resolution	2560x1920, 2560x1440, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation
Lens	
Optional Lens	SLA-5M3700D(5MP 3.7mm) SLA-5M4600D(5MP 4.6mm) SLA-5M7000D(5MP 7.0mm)
Operational	
Camera Title	Displayed up to 85 characters
Day & Night	Auto(Electrical)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR V
Digital Image Stabilization	Support
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Defocus detection, Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line
Alarm Triggers	Analytics, Network disconnect
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Handover
Network	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Smart Codec	Manual(5ea area), WiseStream II
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)

<b>Protocol</b>	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
<b>Security</b>	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
<b>Application Programming Interface</b>	ONVIF Profile S SUNAPI(HTTP API)

**General**

<b>Web Viewer</b>	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
<b>Edge Storage</b>	Micro SD/SDHC/SDXC 2slot 256GB(Each CH)
<b>Memory</b>	1024MB RAM, 256MB Flash

**Environmental & Electrical**

<b>Operating Temperature / Humidity</b>	-40°C ~ +55°C(-40°F ~ +131°F) / Less than 90% RH
<b>Storage Temperature / Humidity</b>	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
<b>Certification</b>	IP66, IK10
<b>Input Voltage</b>	PoE+(IEEE802.3af, Class3)
<b>Power Consumption</b>	PoE+: 12.95W, typical 12.00W

**Mechanical**






<b>Color / Material</b>	White / Aluminum
<b>RAL Code</b>	RAL9003
<b>Product Dimensions / Weight</b>	Ø197.6x84mm(7.78x3.31"), 1250g(2.76 lb)

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

**Compatible lenses**

Video	SLA-5M3700D	SLA-5M4600D	SLA-5M7000D
<b>Imaging Device</b>	1/1.8" 5MP CMOS	1/1.8" 5MP CMOS	1/1.8" 5MP CMOS
<b>Effective Pixels</b>	2616(H)x1976(V)	2616(H)x1976(V)	2616(H)x1976(V)
<b>Min. Illumination</b>	Color : 0.16Lux(F1.6, 1/30sec, 30IRE) B/W : 0.16Lux(F1.6, 1/30sec, 30IRE)	Color : 0.16Lux(F1.6, 1/30sec, 30IRE) B/W : 0.16Lux(F1.6, 1/30sec, 30IRE)	Color : 0.16Lux(F1.6, 1/30sec, 30IRE) B/W : 0.16Lux(F1.6, 1/30sec, 30IRE)
<b>Lens</b>			
<b>Focal Length (Zoom Ratio)</b>	3.7mm fixed focal	4.6mm fixed focal	7.0mm fixed focal
<b>Max. Aperture Ratio</b>	F1.6	F1.6	F1.6
<b>Angular Field of View</b>	H:97.5°, V:71.9°, D:126.2°	H: 77.9°, V: 57.9°, D: 98.7°	H: 50.7°, V: 37.8°, D: 63.8°
<b>Lens Type</b>	Fixed focal	Fixed focal	Fixed focal
<b>Pan / Tilt / Rotate</b>			
<b>Pan / Tilt / Rotate Range</b>	-90°~+90° / +36~+73° / -180°~+180°	-90°~+90° / +36~+73° / -180°~+180°	-90°~+90° / +36~+73° / -180°~+180°
<b>Operational</b>			
<b>Wide Dynamic Range</b>	120dB	120dB	120dB
<b>Day &amp; Night</b>	Auto(Electrical)	Auto(Electrical)	Auto(Electrical)
<b>Mechanical</b>			
<b>Color / Material</b>	Black / Plastic	Black / Plastic	Black / Plastic
<b>Product dimensions / weight</b>	Ø35.5x35.9mm(1.40x1.41") / 35g(0.08 lb)	Ø35.5x35.9mm(1.40x1.41") / 35g(0.08 lb)	Ø35.5x35.9mm(1.40x1.41") / 35g(0.08 lb)

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

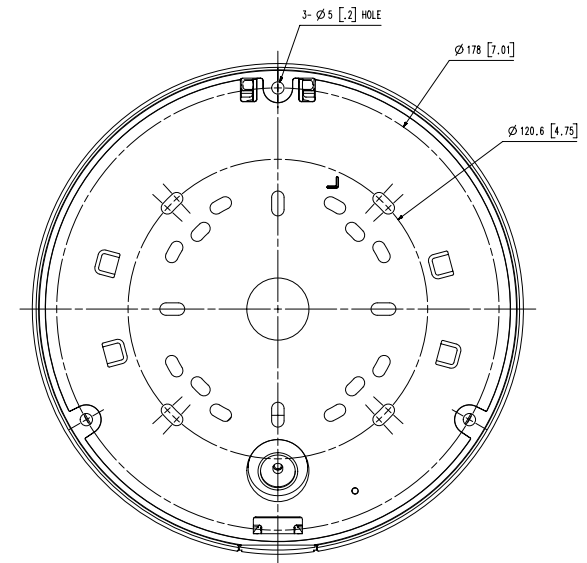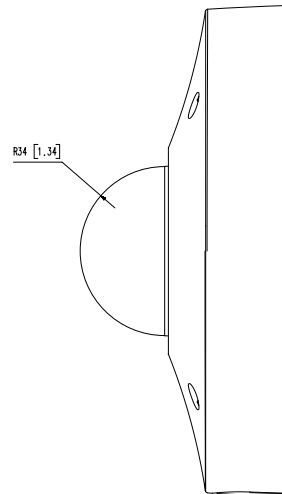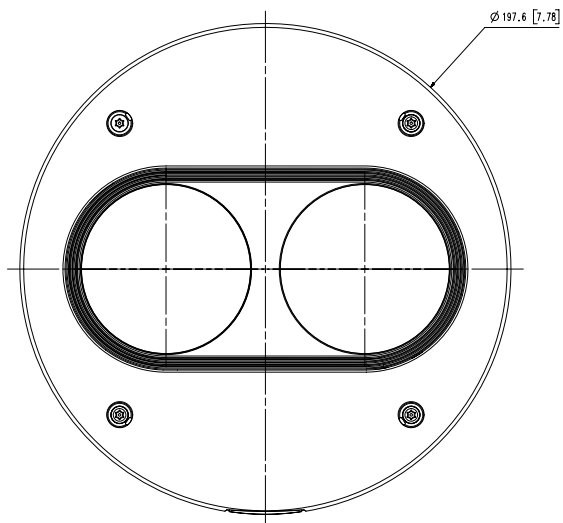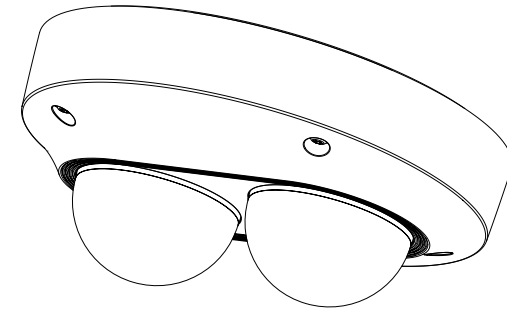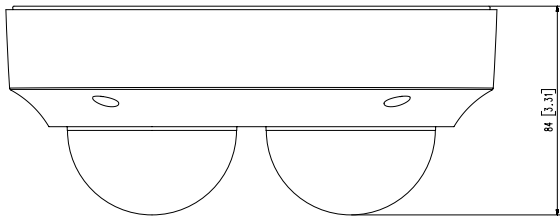

UNIT : mm [inch]